


IEC 60320 C-13, LEFT ANGLE

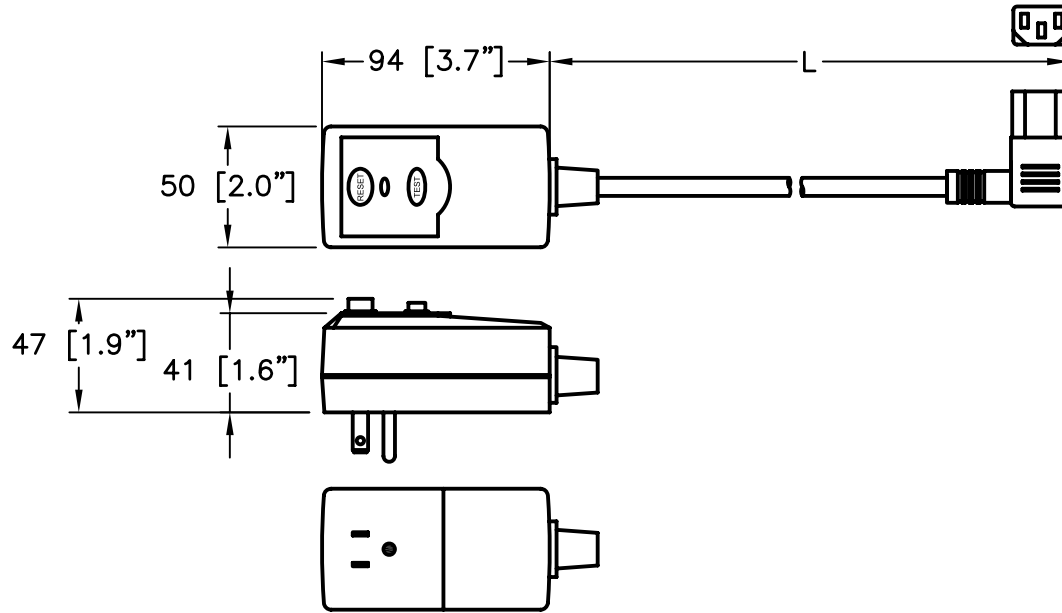

Description	User Attachable GFCI, Plug-Head Style
Plug Configuration	Nema 5-15p
Rated Current	15 amps
Rated Supply Voltage	120 Volts +10/-15%
Frequency	60 Hz
Polarity	2 Pole 3 Wire
Tripping Current	4-6 mA
Maximum Tripping Time	25 ms
Ambient Temperature Range	-35C to 66C
Reset Type upon Power Loss	Manual (also known as Active or non-Latching)
Color	Black
Design	UL Standard 943 Class A, CUL C22.2 compliant UL / CUL Listed Rainproof Design
Cordage	14/3 SJTW, Black
Receptacle (Connector)	IEC 60320 C-13, Left Angle, Black
Function	Test and Reset Buttons not to be used as ON/OFF switch

ALL DIMENSIONS ARE IN MILLIMETERS

WORLD CORD SETS, INC.

TEL (860)763-2100
FAX (860)763-1183



www.WorldCordSets.com
sales@WorldCordSets.com

TITLE	GFCI Cord Set, PLUG-HEAD STYLE
-------	--------------------------------

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF WORLD CORD SETS. NO USE OR REPRODUCTION IN PART OR WHOLE MAY BE MADE WITHOUT WRITTEN PERMISSION FROM WORLD CORD SETS.

SCALE	DATE	PART NO.	REV
NONE	12-3-2007	PMB3-23AL-XXXX	-